



#### Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	$I_D$
-30V	43mΩ@-10V	-4.2A
	52mΩ@-4.5V	
	72mΩ@-2.5V	


#### Feature

- TrenchFET Power MOSFET
- Exceptional on-resistance and maximum DC current capability


#### Application

- DC/DC Converter
- Load Switch for Portable Devices
- Battery Switch

#### MARKING:




#### SOT-23



1. GATE
2. SOURCE
3. DRAIN

#### Schematic diagram

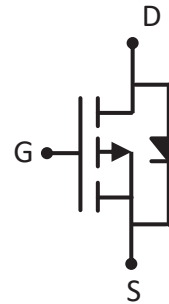

#### ABSOLUTE MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain - Source Voltage	$V_{DS}$	-30	V
Gate - Source Voltage	$V_{GS}$	$\pm 12$	V
Continuous Drain Current <sup>1,5</sup>	$I_D$	-4.2	A
	$T_A = 25^\circ\text{C}$		
Pulsed Drain Current <sup>2</sup>	$I_{DM}$	-17	A
Power Dissipation <sup>4,5</sup>	$P_D$	1.5	W
	$T_A = 25^\circ\text{C}$		
Thermal Resistance from Junction to Ambient <sup>5</sup>	$R_{\theta JA}$	83.3	$^\circ\text{C}/\text{W}$
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55~ +150	$^\circ\text{C}$







## MOSFET ELECTRICAL CHARACTERISTICS( $T_a=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Type	Max	Unit
<b>Static Characteristics</b>						
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = -250\mu A$	-30			V
Zero gate voltage drain current	$I_{DSS}$	$V_{DS} = -24V, V_{GS} = 0V$			-1	$\mu A$
Gate-body leakage current	$I_{GSS}$	$V_{GS} = \pm 12V, V_{DS} = 0V$			$\pm 100$	nA
Gate threshold voltage <sup>3</sup>	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\mu A$	-0.7	-0.9	-1.3	V
Drain-source on-resistance <sup>3</sup>	$R_{DS(on)}$	$V_{GS} = -10V, I_D = -4.2A$		43	65	m $\Omega$
		$V_{GS} = -4.5V, I_D = -4A$		52	75	
		$V_{GS} = -2.5V, I_D = -1A$		72	90	
Forward transconductance <sup>3</sup>	$g_{FS}$	$V_{DS} = -5V, I_D = -4.2A$		10		S
<b>Dynamic characteristics</b>						
Input Capacitance	$C_{iss}$	$V_{DS} = -15V, V_{GS} = 0V, f = 1MHz$		954		pF
Output Capacitance	$C_{oss}$			115		
Reverse Transfer Capacitance	$C_{rss}$			77		
<b>Switching characteristics</b>						
Turn-on delay time	$t_{d(on)}$	$V_{GS} = -10V, V_{DS} = -15V,$ $R_L = 3.6\Omega, R_{GEN} = 6\Omega$			6.3	ns
Turn-on rise time	$t_r$				3.2	
Turn-off delay time	$t_{d(off)}$				38.2	
Turn-off fall time	$t_f$				12	
<b>Source-Drain Diode characteristics</b>						
Diode forward current	$I_S$				-2	A
Diode pulsed forward current	$I_{SM}$				-15	A
Diode Forward voltage <sup>3</sup>	$V_{DS}$	$V_{GS} = 0V, I_S = -4.2A$			-1.2	V




### Notes:

1. The maximum current rating is limited by package.
2. Pulse Test : Pulse Width  $\leq 10\mu s$ , duty cycle  $\leq 1\%$ .
3. Pulse Test : Pulse Width  $\leq 300\mu s$ , duty cycle  $\leq 2\%$ .
4. The power dissipation  $P_D$  is limited by  $T_{J(MAX)} = 150^{\circ}\text{C}$ .
5. Device mounted on  $1in^2$  FR-4 board with 2oz. Copper, in a still air environment with  $T_A = 25^{\circ}\text{C}$ .

**Typical Electrical and Thermal Characteristics**

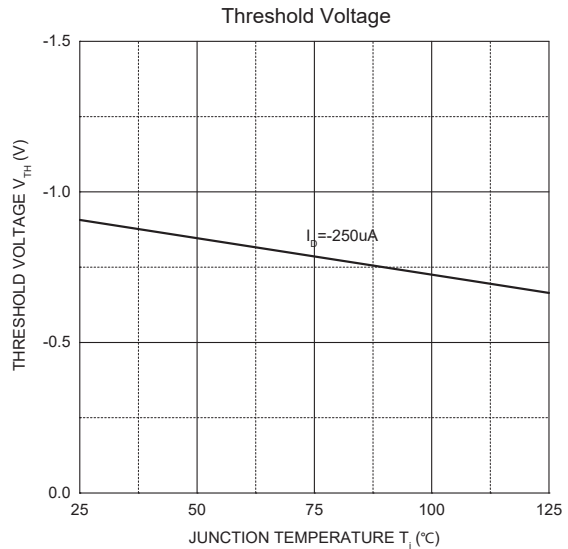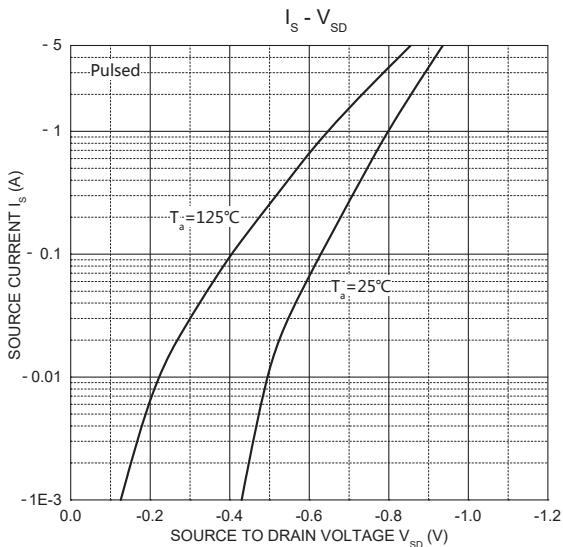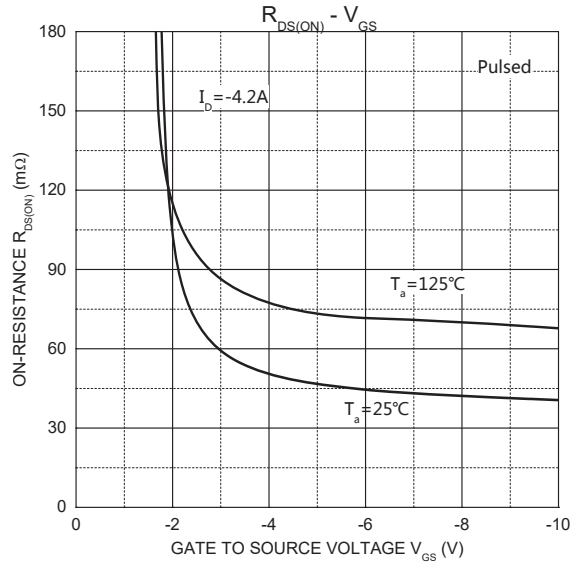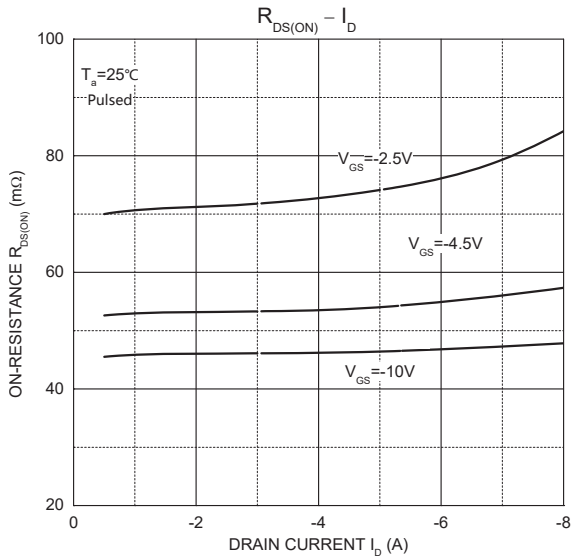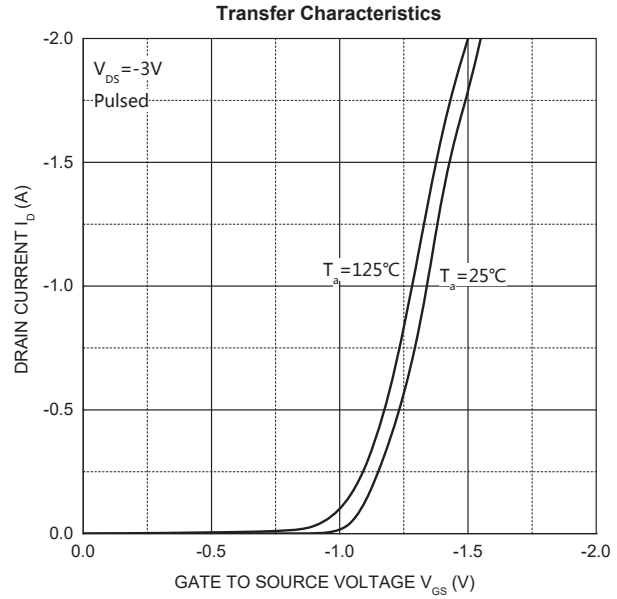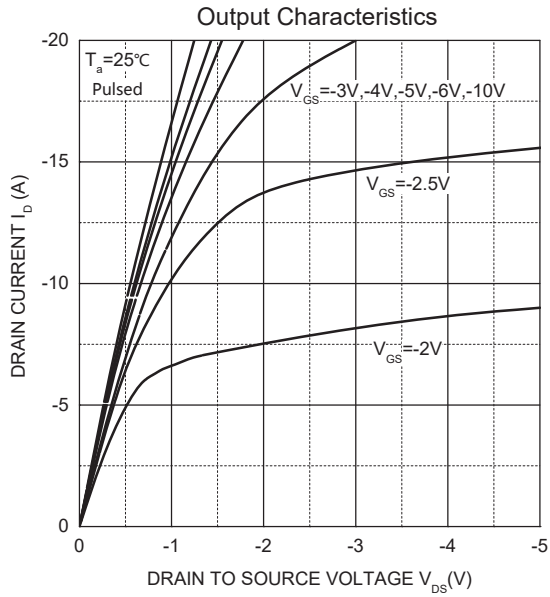

## SOT-23 Package Information

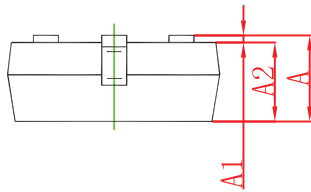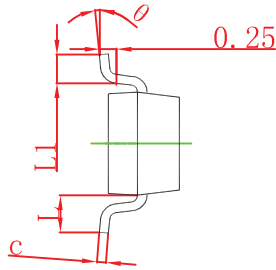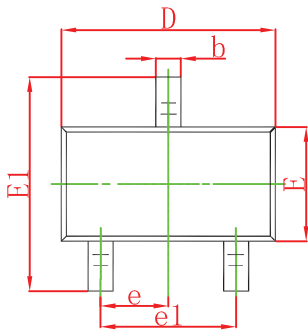


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

**SOT-23 Tape and Reel**


**SOT-23 Tape and reel**

SOT-23 Embossed Carrier Tape

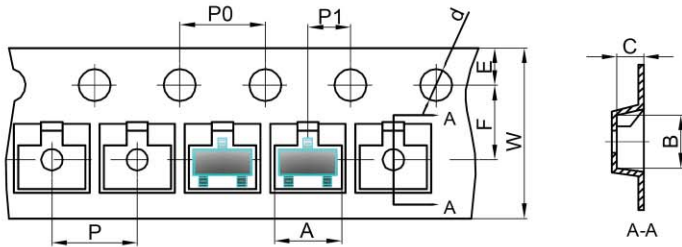


Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

**SOT-23 Tape Leader and Trailer**

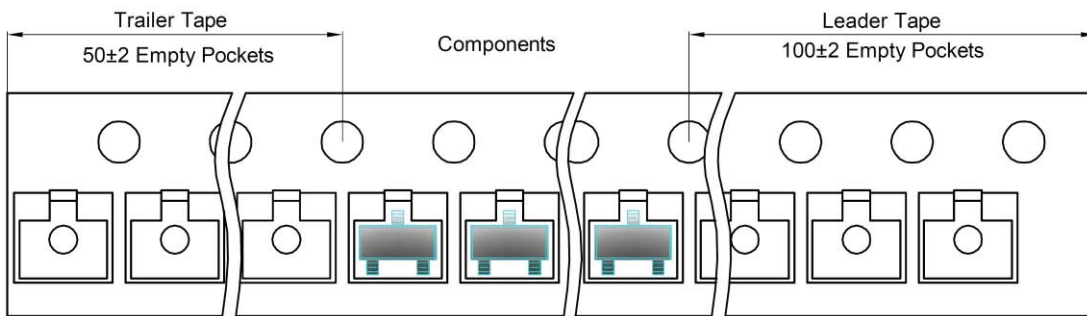

**SOT-23 Reel**

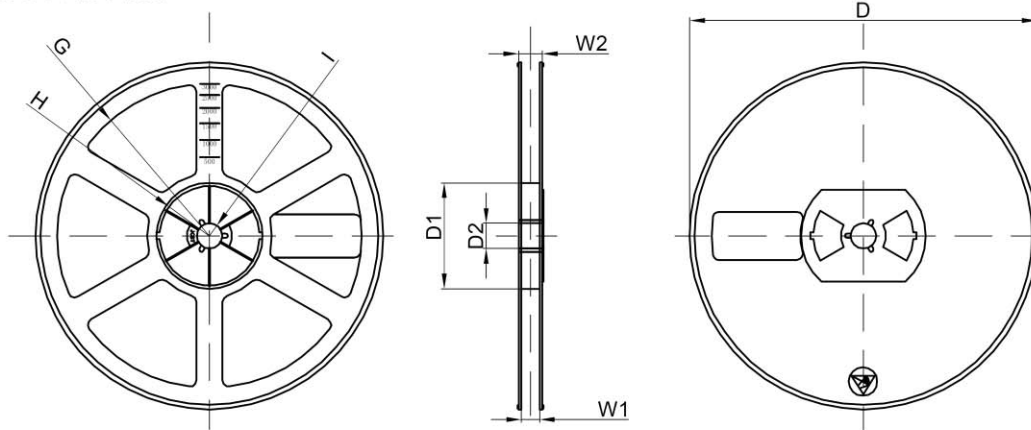

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7" Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	30,000 pcs	203×203×195	120,000 pcs	438×438×220	